



# АВТОМОБИЛИ БОРТОВЫЕ DROP-SIDE TRUCK



Designed for carrying  
of different loads, possible use  
in the roadtrain

**(4x2)**

/ MAZ

-5340 3-420


-5340 3-470

**-5340B3-420-000  
(-5340B3-470-000)**

	/ Tolerable gross mass of roadtrain, kg	36000
	/ Tolerable gross mass of truck, kg	19000
	/ Distribution of gross mass :	
-	/ tolerable on front axle, kg	7500
-	/ tolerable on rear axle, kg	11500
	/ Equipped truck mass, kg	8620
	/ Tolerable payload carried of truck, kg	10230
	<sup>3</sup> / Volume of a platform, m <sup>3</sup>	38,74
	/	15,25
/ Engine		- 5361
	/ Power, kW / hp	198/270
/ Gearbox		ZF 9S1310 TO (9JS135TA)
/ Number of speeds of the gearbox		9
/ Gear ratio		4,2
/ Rear suspension		/ few-leaf spring with stabilizer
	/ High speed, km/h	85*
/ Fuel tank, l		500
/ Tyres dimensions		315/80R22,5
/ Cab		6501 / small
/ Type platform		/
/ Equipment particularities		

\*) / With speed-limiting device  
300 /

/ Technical data and dimension are given for standard configuration

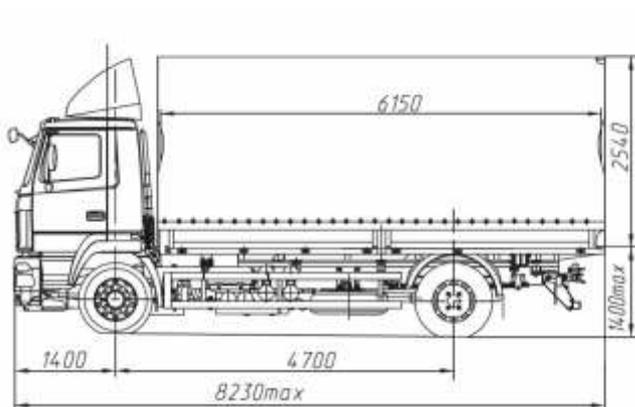



## DROP-SIDE TRUCK

Designed for carrying of different loads, possible use in the roadtrain

**(4x2)**


/ MAZ  
-5340B3-420  
-5340 3-470



		-5340B3-420-005 (-5340 3-470-005)
	/ Tolerable gross mass of roadtrain, kg	36000
	/ Tolerable gross mass of truck, kg	19000
	/ Distribution of gross mass :	
-	/ tolerable on front axle, kg	7500
-	/ tolerable on rear axle, kg	11500
	/ Equipped truck mass,kg	8320
	/ Tolerable payload carried of truck, kg	10530
	/ Engine	15,25
	/ Power, kW / hp	- 5361
	/ Gearbox	198 / 270
	/ Number of speeds of the gearbox	ZF 9S1310 TO (9JS135TA)
	/ Gear ratio	9
	/ High speed, km/h	4,2
	/ Fuel tank, l	85*
	/ Tyres dimensions	500
/ Cab		315/80R22,5
	/ Type platform	6501/ small 6501
	/ Equipment particularities	- /

\*) / With speed-limiting device  
300 ./

/Technical data and dimension are given for standard configuration

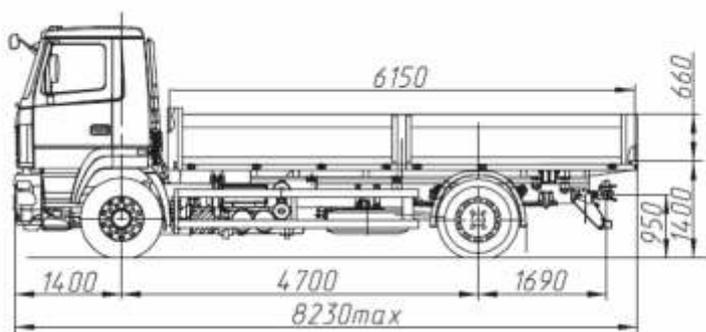



## АВТОМОБИЛИ БОРТОВЫЕ DROP-SIDE TRUCK



Designed for carrying  
of different loads, possible use  
in the roadtrain

**(4x2)**

/ MAZ



-5340 5-8420

-5340 5-8470

		<b>-5340B5-8420-000</b> <b>(-5340B5-8470-000)</b>
	, / Tolerable gross mass of roadtrain, kg	44000
	, / Tolerable gross mass of truck, kg	19000
	/ Distribution of gross mass :	
-	, / tolerable on front axle, kg	7500
-	, / tolerable on rear axle, kg	11500
	, / Equipped truck mass, kg	8890
	, / Tolerable payload carried of truck, kg	9960
	, <sup>3</sup> / Volume of a platform, m <sup>3</sup>	38,74
		15,25
/ Engine		- 5361
	, / . . / Power, kW / hp	228 / 310
/ Gearbox		ZF 9S1310 TO (9JS135TA)
/ Number of speeds of the gearbox		9
	/ Gear ratio	4,59
/ Rear suspension		/
	, / High speed, km/h	85*
	, / Fuel tank, l	500
	/ Tyres dimensions	315/80R22,5
/ Cab		5440 / large
/ Type platform		/
/ Equipment particularities	-	/

\*) / With speed-limiting device  
300 ./

/ Technical data and dimension are given for standard configuration

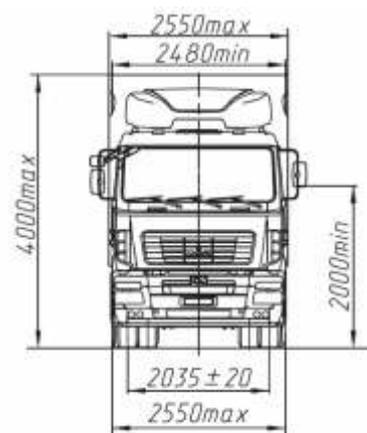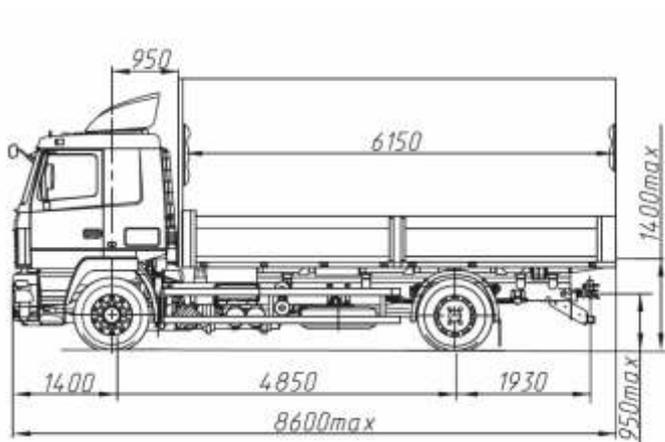



## DROP-SIDE TRUCK

Designed for carrying of different loads, possible use in the roadtrain

**(4x2)**



/ MAZ  
-5340B5-8420  
-5340 5-8470



		-5340B5-8420-005 (-5340 5-8470-005)
	/ Tolerable gross mass of roadtrain, kg	44000
	/ Tolerable gross mass of truck, kg	19000
	/ Distribution of gross mass :	
-	/ tolerable on front axle, kg	7500
-	/ tolerable on rear axle, kg	11500
	/ Equipped truck mass,kg	8590
	/ Tolerable payload carried of truck, kg	10260
		15,25
/ Engine		- 5361
	/ Power, kW / hp	228 / 310
/ Gearbox		ZF 9S1310 TO (9JS135TA)
	/ Number of speeds of the gearbox	9
	/ Gear ratio	4,59
/ Rear suspension		/
	/ High speed, km/h	85*
	/ Fuel tank, l	500
	/ Tyres dimensions	315/80R22,5
/ Cab		5440 / large
/ Type platform		/
	/ Equipment particularities	/

\*) / With speed-limiting device  
300 ./

/ Technical data and dimension are given for standard configuration

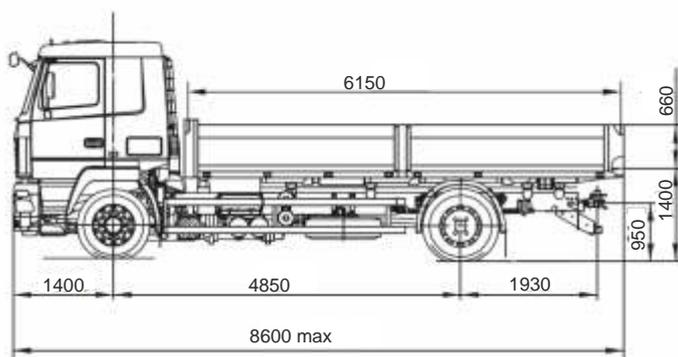



# АВТОМОБИЛИ БОРТОВЫЕ DROP-SIDE TRUCK



Designed for carrying  
of different loads, possible use  
in the roadtrain


**(4x2)**

/ MAZ  
-5340W6-8421

		<b>-5340W6-8421-000</b> <b>(-5340W6-8421-005)</b>
/ Tolerable gross mass of roadtrain, kg		46000
/ Tolerable gross mass of truck, kg		19000
/ Distribution of gross mass :		
-	/ tolerable on front axle, kg	7500
-	/ tolerable on rear axle, kg	11500
/ Equipped truck mass, kg		9500 (9200)
/ Distribution of equipped weight		
-	/ on front axle, kg	5480 (5430)
-	/ on rear axle, kg	4020 (3770)
/ Tolerable payload carried of truck, kg		9350 (9650)
/ Engine		Cummins ISLe360 40
/ Power, kW / hp		265 / 360
/ Gearbox		12JS200TA
/ Number of speeds of the gearbox		12
/ Gear ratio		4,59
/ Rear suspension		/
/ High speed, km/h		85*
/ Fuel tank, l		500
/ Tyres dimensions		315/80R22,5
/ Cab		5440 / large
/ Type platform		( )
/ Equipment particularities		/

\*) / With speed-limiting device

/ Technical data and dimension are given for standard configuration

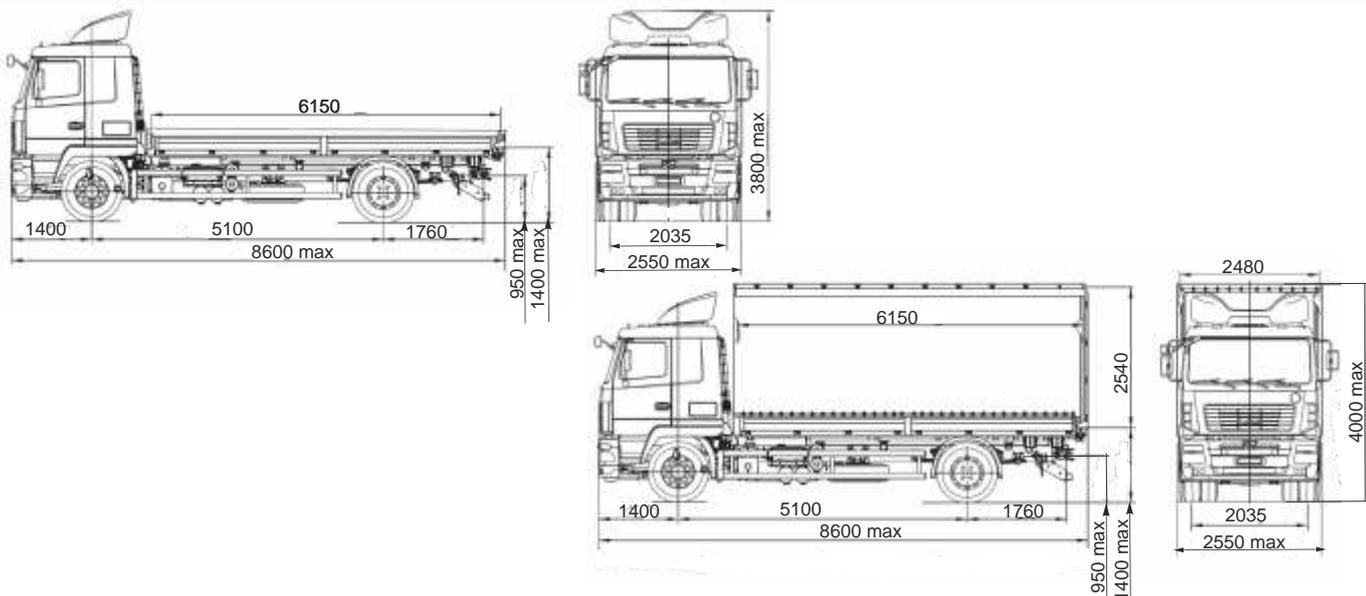



## DROP-SIDE TRUCK

Designed for carrying of different loads, possible use in the roadtrain

(4 2)

/ MAZ

-534019-420

-5340 9-520

-5340 9-522



	-534019-420-031	-5340 9-520-031 (-5340 9-522-031)
/ Tolerable gross mass of roadtrain, kg	46000 (42600***)	46000 (42600***)
/ Tolerable gross mass of truck, kg	18600	18600
/ Distribution of gross mass :		
- / tolerable on front axle, kg	7100	7100
- / tolerable on rear axle, kg	11500	11500
/ Equipped truck mass, kg	9700	9600 (9800)
/ Tolerable payload carried of truck, kg	8750	8850 (8650)
/ Engine	111 (44,3+66,7***)	111 (44,3+66,7***)
	○ 501 LA.IV ( -4)	○ 501 LA.V ( -5)
/ Power, kW / hp	320 / 435	320 / 435
/ Gearbox	ZF 16S2520	ZF 16S2520
/ Number of speeds of the gearbox	16	16
/ Gear ratio	3,45	3,45
/ Rear suspension	4-	4-
/ High speed, km/h	85*	85*
/ Fuel tank, l	500	500
/ Tyres dimensions	315/60R22,5 235/75R17,5	315/60R22,5 235/75R17,5
/ Cab	6431 / large	6431 / large
/ Type platform	/	/
/ Equipment particularities	-	-

\*) / With speed-limiting device


\*\*\*) ( ) -4

870102

-534019-420-031 -5340 9-520-031

-5340 9-522-031, -534019-420-031

/ Technical data and dimension are given for standard configuration

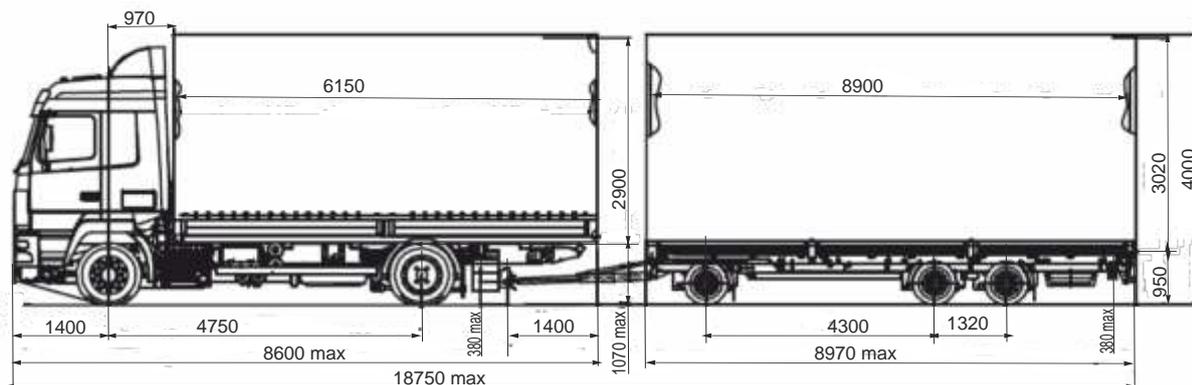



# АВТОМОБИЛИ БОРТОВЫЕ DROP-SIDE TRUCK



Designed for carrying  
of different loads, possible use  
in the roadtrain

(6 2)

/ MAZ

-6310 9-520

-631019-420

-6310 9-522

	-631019-420-031	-6310 9-520-031 (-6310 9-522-031)
/ Tolerable gross mass of roadtrain, kg	43700	43700
/ Tolerable gross mass of truck, kg	25700	25700
/ Distribution of gross mass :		
- / tolerable on front axle, kg	7100	7100
- / tolerable on rear axle, kg	11500	11500
- /	7100	7100
/ Equipped truck mass, kg	11340	11340 (11540)
/ Tolerable payload carried of truck, kg	14210	14210(14010)
/	116 (56+60)	116 (56+60)
/ Engine	O 501 LA.IV ( -4)	O 501 LA.V ( -5)
/ Power, kW / hp	320 / 435	320 / 435
/ Gearbox	ZF 16S2520	ZF 16S2520
/ Number of speeds of the gearbox	16	16
/ Gear ratio	3,45	3,45
/ Rear suspension	4-	4-
/ High speed, km/h	85*	85*
/ Fuel tank, l	500	500
/ Tyres dimensions	315/60R22,5	315/60R22,5
	235/75R17,5	235/75R17,5
/ Cab	6431 / large	6431 / large
/ Type platform		
/ Equipment particularities	-	


\*) / With speed-limiting device

\*\*) ( ) -4/

-631019-420-031/

-6310 9-522-031, -631019-420-031/

/Technical data and dimension are given for standard configuration

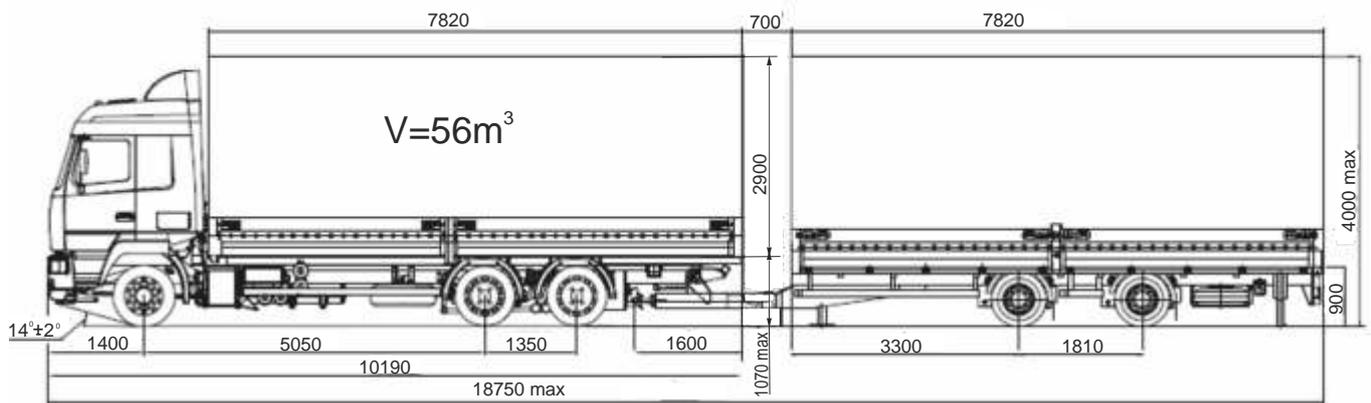



## DROP-SIDE TRUCK

Designed for carrying of different loads, possible use in the roadtrain

(6 4)


/ MAZ  
-6312W6-8421



		-6312W6-8421-000 (-6312W6-8421-005)
	/ Tolerable gross mass of roadtrain, kg	46000
	/ Tolerable gross mass of truck, kg	26500
	/ Distribution of gross mass :	
-	/ tolerable on front axle, kg	7500
-	/ tolerable on rear axle, kg	19000
	/ Equipped truck mass, kg	12100(11600)
	/ Distribution of equipped weight	
-	/ on front axle, kg	5430 (5380)
-	/ tolerable on rear axle, kg	6670 (6220)
	/ Tolerable payload carried of truck, kg	14280 (14750)
/ Engine		Cummins ISLe4 360 ( -4)
	/ Power, kW / hp	265 / 360
/ Gearbox		12JS200TA
	/ Number of speeds of the gearbox	12
	/ Gear ratio	4,2
/ Rear suspension		
	/ High speed, km/h	85*
	/ Fuel tank, l	500
	/ Tyres dimensions	315/80R22,5
/ Cab		5440 / large
	/ Type platform	( ) /
	/ Equipment particularities	- /

\*) / With speed-limiting device

/ Technical data and dimension are given for standard configuration

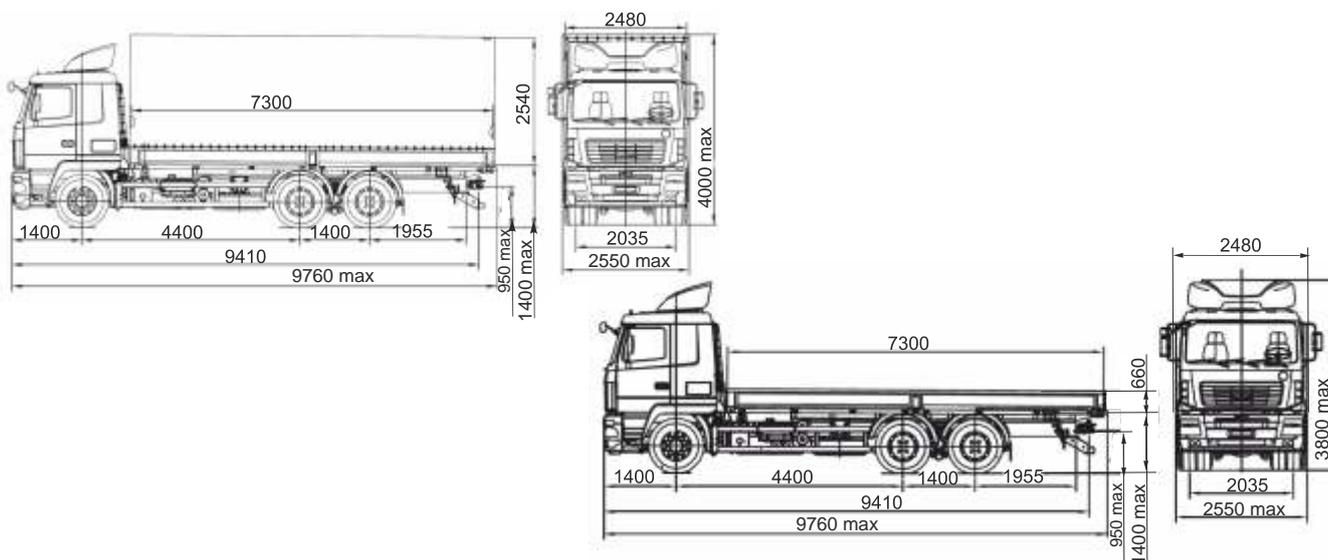



## АВТОМОБИЛИ БОРТОВЫЕ DROP-SIDE TRUCK



Designed for carrying  
of different loads, possible use  
in the roadtrain

(6 4)

/ MAZ


-6312B9-420    -6312B9-430  
-6312B9-470

				-6312 9-420-010, -000	
				-6312 9-430-010**;	-6312 9-470-010, -000**
					56500
					26500
				/ Distribution of gross mass :	
-					7500
-					19000
					12100
				/ Distribution of equipped weight	
-					5620
-					6480
					14250
					18
/ Engine					- 651 ( -4)
					303 / 412
/ Gearbox				ZF16S2520TO;	14.180**;
/ Number of speeds of the gearbox					12JS200TA***
/ Gear ratio					16; 12**;
					14***
					3,86 (4,2)
/ Rear suspension					
-	-6312 9-420 (-470)-000			-	/ springs and walking beams
-	-6312 9-420 (-470)-010			-	/ springs and walking beams
					85*
					500
					315/80R22,5
/ Cab					6431 / large
/ Type platform					/
/ Equipment particularities					

\*)

/ With speed-limiting device

/ Technical data and dimension are given for standard configuration

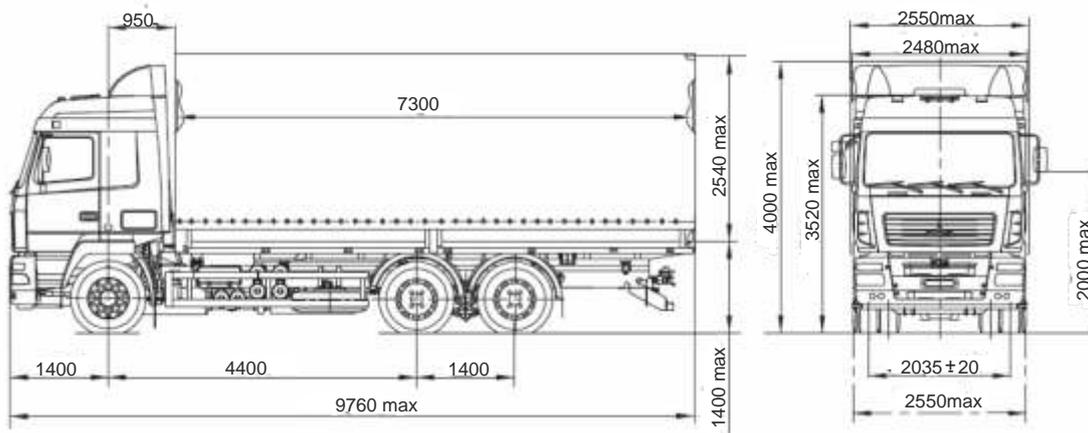





# АВТОМОБИЛИ БОРТОВЫЕ DROP-SIDE TRUCK



Designed for carrying  
of different loads, possible use  
in the roadtrain

(6 6)

/ MAZ


-6317 5-414

-6317 5-415

		<b>-6317 5-414-001</b>
		<b>(-6317 5-415-001*)</b>
	, / Tolerable gross mass of roadtrain, kg	45000
	, / Tolerable gross mass of truck, kg	25150
	/ Distribution of gross mass :	
-	, / tolerable on front axle, kg	7150
-	, / tolerable on rear axle, kg	18000
	, / Equipped truck mass,kg	14000 (13500*)
	, / Tolerable payload carried of truck, kg	11000 (11500*)
/ Engine		- 65853 ( -4)
	, / . . . / Power, kW / hp	243 / 330
/ Gearbox		- 239
/ Number of speeds of the gearbox		9
	/ Gear ratio	6,59
	, / / High speed, km/h	80
	, / Fuel tank, l	200+350 /
	/ Tyres dimensions	16,00R20
/ Cab		/ large
/ Type platform		/
/ Equipment particularities		/

\*)

/ Technical data and dimension are given for standard configuration

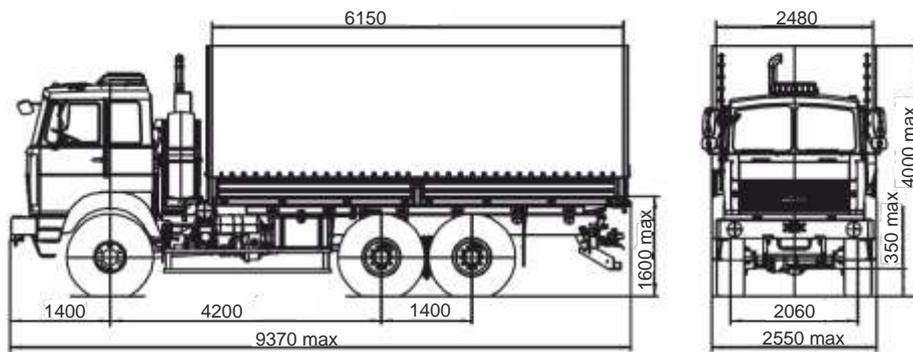

АВТОМОБИЛИ БОРТОВЫЕ  
DROP-SIDE TRUCK