



# ЕВРО-4



**ШАССИ АВТОМОБИЛЬНЫЕ**  
CHASSIS OF TRUCKS



## ШАССИ АВТОМОБИЛЬНЫЕ CHASSIS OF TRUCKS



Are designed for different  
special equipment  
installation

**(4x2)**

/ MAZ

-4371 2-440(-441)

-4371 2-450(-451)



	-4371 2-440-000 (-4371 2-441-000)	-4371 2-450-000 (-4371 2-451-000)
/ Tolerable gross mass of roadtrain, kg		18000
/ Tolerable gross mass of truck, kg	10100	10100
/ Distribution of gross mass :		
- / tolerable on front axle, kg	3800	3800
- / tolerable on rear axle, kg	6300	6300
Equipped truck mass, kg	4350(4300)	4350(4300)
/ Distribution of equipped mass :		
- / on front axle, kg	2950(2940)	2950(2940)
- / on rear axle, kg	1400(1360)	1400(1360)
/ Tolerable payload carried, kg	5600(5650)	5600(5650)
/ Wheelbase, mm	4200(3700)	4200(3700)
/ Engine	M -245.35 4	M -245.35 4
/ Power, kW /hp	124 / 169	124 / 169
/ Gearbox	FAST GEAR 6J70T	FAST GEAR 6J70T
/ Number of speeds of the gearbox	6	6
/ Gear ratio	3,9	3,9
/ Maximum speed, km/h	85*	85*
/ Fuel tank, l	200	200
/ Tyres dimensions	235/75R17,5	235/75R17,5
/ Cab	2- / small 2 seat	2- / small 2 seat
/ Equipment particularities		

\*) / With speed-limiting device

-4371 2-440(441)-001 -

-4371 2-440(441)-002 -

/ Technical data and dimension are given for standard configuration

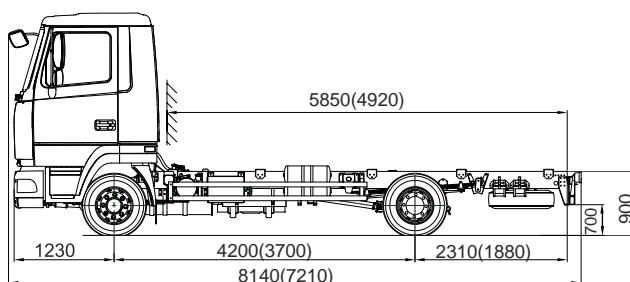



# ШАССИ АВТОМОБИЛЬНЫЕ

## CHASSIS OF TRUCKS

Are designed for different special equipment installation

**(4x2)**



/ MAZ  
-4371W1-440, 441  
-4371W2-450, 451



	-4371W1-440-001 (-4371W1-441-001)	-4371W2-450-000 (-4371W2-451-000)
/ Tolerable gross mass of roadtrain, kg		18000
/ Tolerable gross mass of truck, kg	10100	10100
- / Distribution of gross mass :		
- / tolerable on front axle, kg	3800	3800
- / tolerable on rear axle, kg	6300	6300
/ Equipped truck mass, kg	4350 (4300)	4350(4300)
- / Distribution of equipped mass :		
- / on front axle, kg	2950(2940)	2950(2940)
- / on rear axle, kg	1400(1360)	1400(1360)
/ Tolerable payload carried, kg	5600(5650)	5600(5650)
/ Wheelbase, mm	4200(3700)	4200(3700)
/ Engine	Cummins ISF 3.84168	Cummins 4ISBe4 185
/ Power, kW /hp	122 / 166	130 / 177
/ Gearbox	FAST GEAR 6J70TA	FAST GEAR 6J70TA
/ Number of speeds of the gearbox	6	6
/ Gear ratio	3,45	3,45
/ Maximum speed, km/h	85*	85*
/ Fuel tank, l	200	200
/ Tyres dimensions	235/75R17,5	235/75R17,5
/ Cab	3- / small 3 seat	2 - / small 2 seat
/ Equipment particularities		

\*) / With speed-limiting device

/ Technical data and dimension are given for standard configuration

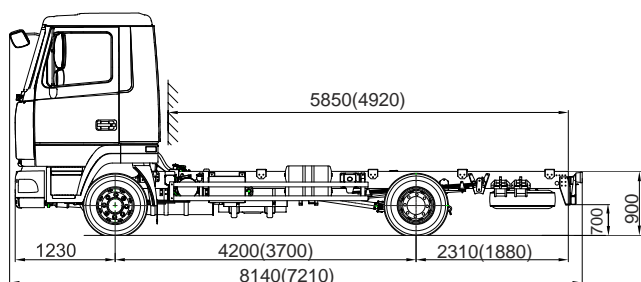



# ШАССИ АВТОМОБИЛЬНЫЕ

## CHASSIS OF TRUCKS





Are designed for different special equipment installation

**(4x2)**

/ MAZ  
-4570W1-442  
-4570W1-442

	-4570W1-442-011	-4570W1-442-012
/ Tolerable gross mass of truck, kg	10100	
/ Distribution of gross mass :		
- / tolerable on front axle, kg	3800	
- / tolerable on rear axle, kg	6300	
/ Equipped truck mass,kg	4150	
/ Distribution of equipped mass :		
- / on front axle, kg	2710	
- / on rear axle, kg	1440	
/ Tolerable payload carried, kg	5800	
/ Wheelbase, mm	3000	
/ Engine	Cummins ISF 3.8 4168	
/ . . . / Power, kW /hp	122 / 166	
/ Gearbox	FAST GEAR 6J70TA	
/ Number of speeds of the gearbox	6	
/ Gear ratio	4,44	
/ Maximum speed, km/h	85*	
/ Fuel tank, l	130	
/ Tyres dimensions	8.25R20	
/ Cab	2-	3- / small 2 seat or 3 seat

\*) / With speed-limiting device  
 -4570W1-442-011 - QC45B ( )  
 -4570W1-442-012 - QC45B ( )  
 / Technical data and dimension are given for standard configuration

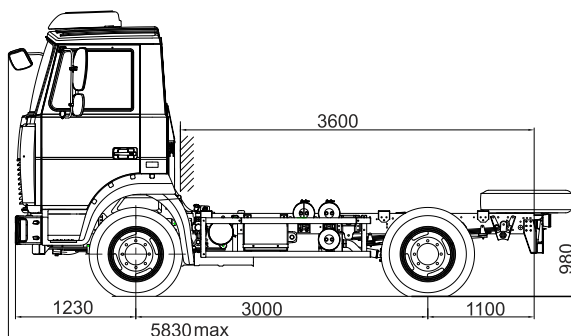

# ШАССИ АВТОМОБИЛЬНЫЕ

## CHASSIS OF TRUCKS

Are designed for different special equipment installation

**(4x2)**

/ MAZ  
-4380W2-440  
-4380 2-440




	-4380W2-440-001 -4380W2-440-002	-4380 2-440-001 -4380 2-440-002
/ Tolerable gross mass of truck, kg	12500	12500
/ Distribution of gross mass :		
- / tolerable on front axle, kg	4500	4500
- / tolerable on rear axle, kg	8000	8000
/ Equipped truck mass,kg		
/ Distribution of equipped mass :		
- / on front axle, kg	3200	3200
- / on rear axle, kg	1550	1550
/ Tolerable payload carried, kg		
/ Wheelbase, mm		
/ Engine		
Cummins 4ISBe4 185 ( -4)		
/ Power, kW /hp		
130 / 177		
/ Gearbox		
FAST GEAR 6J70T		
/ Number of speeds of the gearbox		
6		
/ Gear ratio		
4,875		
/ Maximum speed, km/h		
85*		
/ Fuel tank, l		
130		
/ Tyres dimensions		
9.00R20		
/ Cab		
2- / small 2 seat		
/ Equipment particularities		

\*)

/ With speed-limiting device

-4380 2-440-001	-4380W2-440-001 -	QC45B ( )
-4380 2-440-002	-4380W2-440-002 -	QC45B( )
-4380W2 -		

/ Technical data and dimension are given for standard configuration

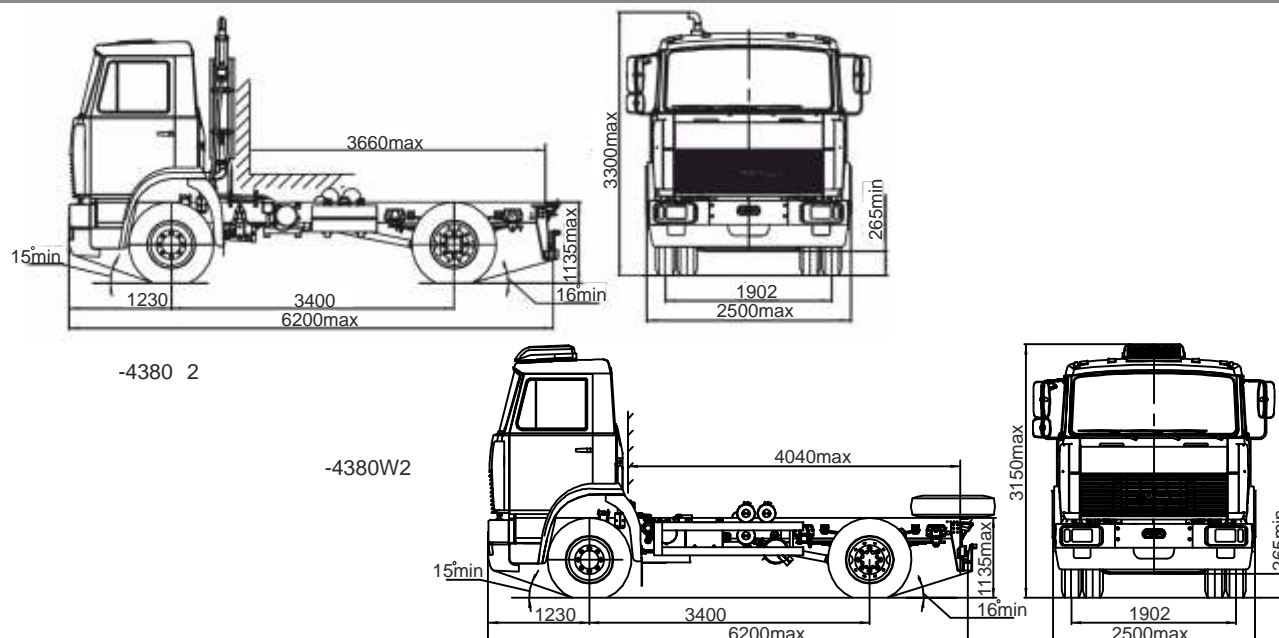





## ШАССИ АВТОМОБИЛЬНЫЕ CHASSIS OF TRUCKS



Are designed for different  
special equipment  
installation

(4 2)

/ MAZ

-5337W3-440


-5337W3-441

-5551W3-440

	-5337W3-440-000, (-5337W3-441-000)	-5551W3-440-000
/ Tolerable gross mass of roadtrain, kg		33200
/ Tolerable gross mass of truck, kg	18500	18200
/ Distribution of gross mass :		
- / tolerable on front axle, kg	7000	6700
- / tolerable on rear axle, kg	11500	11500
/ Equipped truck mass,kg	6000(5920)	6125
/ Tolerable payload carried, kg	12500(12580)	12000
/ Distribution of equipped weight		
- / on front axle, kg	3940(3910)	4125
- / on rear axle, kg	2060(2010)	2000
/ Engine	Cummins 6ISBe4 245 ( -4)	Cummins 6ISBe4 245 ( -4)
/ Power, kW /hp	180/245	180/245
/ Gearbox	9JS135TA	9JS135TA
/ Number of speeds of the gearbox	9	9
/ Gear ratio	6,4	6,4
/ Rear suspension		/
		Spring
/ Maximum speed, km/h	85*	85*
/ Fuel tank, l	200	200
/ Tyres dimensions	12.00R20	315/80R22,5
/ Cab	/ small	/ small
	1450 (990)	
/ Equipment particularities		

\*) / With speed-limiting device

/Technical data and dimension are given for standard configuration

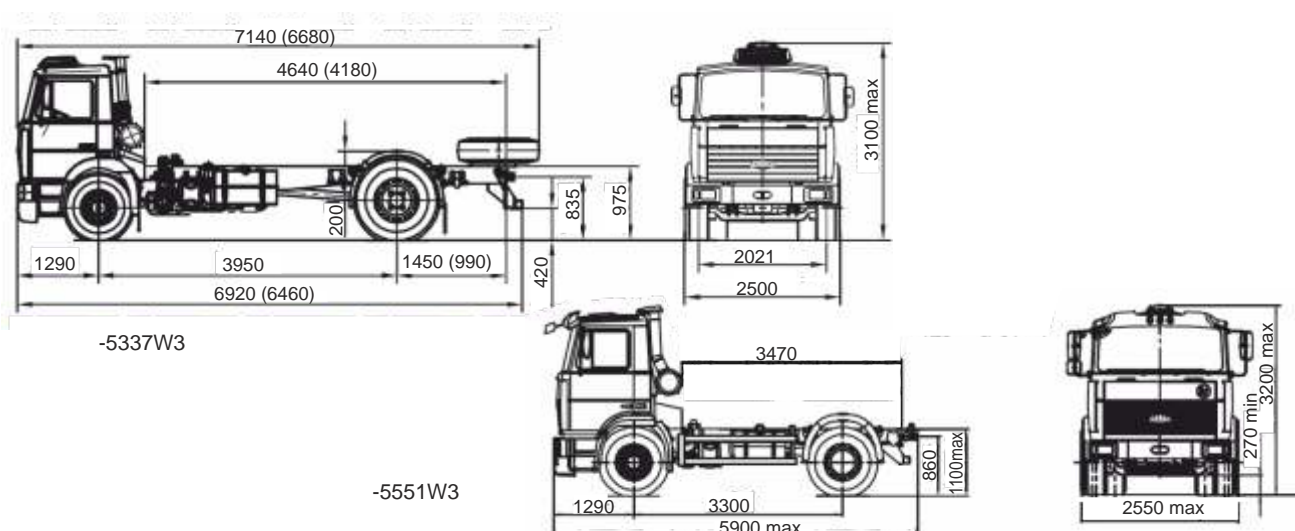

e-mail: market@maz.by



# ШАССИ АВТОМОБИЛЬНЫЕ

## CHASSIS OF TRUCKS

Are designed for different special equipment installation

(4 2)

/ MAZ



-5550B2-480     -5550B3-480  
 -5550B2-420     -5550B3-420



	-5550B2-480-041 (-5550B2-420-041)		-5550B3-480-042 (-5550B3-420-042)	
/ Tolerable gross mass of truck, kg	19000		20500	
/ Distribution of gross mass :				
- / tolerable on front axle, kg	7500		7500	
- / tolerable on rear axle, kg	11500		11500	
/ Equipped truck mass,kg	6725		6775	
/ Tolerable payload carried, kg	12200		13650	
/ Engine	-5363.10		-5361.10	
/ . . / Power, kW /hp	176/240		198/270	
/ Gearbox	9JS135 A(ZF9S1310 )		9JS135 A (ZF9S1310 )	
/ Number of speeds of the gearbox	9		9	
/ Gear ratio	6,4		6,4	
/ Maximum speed, km/h	85*		85*	
/ Fuel tank, l	300		300	
/ Tyres dimensions	12.00R20 315/80R22,5		12.00R20 315/80R22,5	
/ Cab	/ small		/ small	
/ Equipment particularities				

\*) / With speed-limiting device

/ Technical data and dimension are given for standard configuration

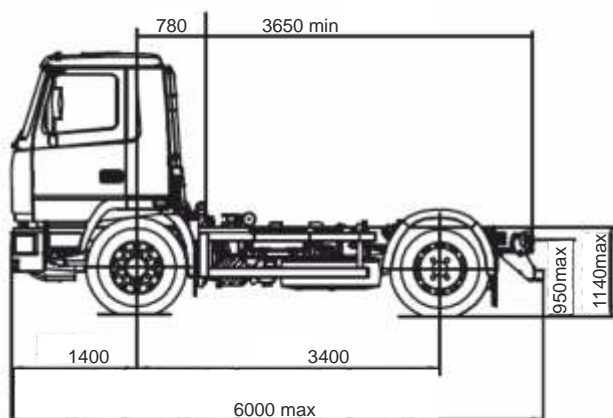



Are designed for different special equipment installation

(4 2)

/ MAZ

-5340B2-425 (-485)

-5340B2-429 (-489)


	-5340 2-425-013 (-5340 2-485-013)	-5340 2-429-013 (-5340 2-489-013)
Tolerable gross mass of truck, kg	20500	20500
/ Distribution of gross mass :		
- , / tolerable on front axle, kg	7500	7500
- , / tolerable on rear axle, kg	13000	13000
/ Equipped truck mass, kg		
- , / Distribution of equipped weight	6770	6770
- , / on front axle, kg	4170	4170
- , / on rear axle, kg	2600	2600
/ Tolerable payload carried, kg		
/ Engine	13580	13580
Power, kW / hp	-5363 ( -4)	-5363 ( -4)
/ Gearbox	ZF9S1310 (9JS135A)	ZF6S1310 (9JS135A)
/ Number of speeds of the gearbox	9	9
/ Gear ratio	5,71	5,71
/ Rear suspension		Spring
/ Maximum speed, km/h	85*	85*
/ Fuel tank, l	300	300
/ Tyres dimensions	315/80R22,5	315/80R22,5
/ Cab	6501/ small	6501/ small
/ Equipment particularities		

\*) / With speed-limiting device

-5340 2-429(489) -

- 940

/Technical data and dimension are given for standard configuration

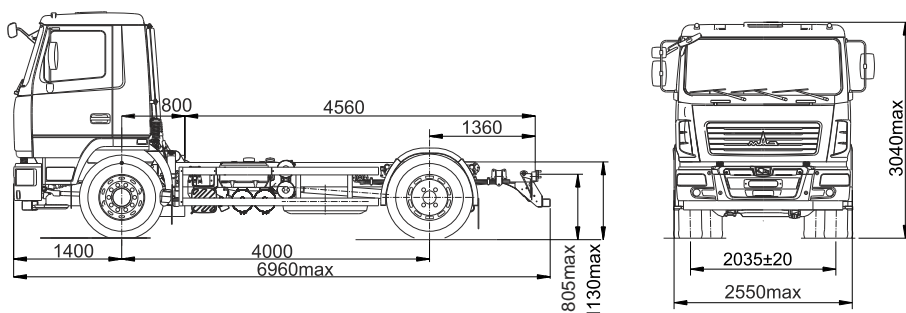



# ШАССИ АВТОМОБИЛЬНЫЕ

## CHASSIS OF TRUCKS

Are designed for different special equipment installation

(4 2)


/ MAZ  
-5340B3-425  
-5340B3-475



				-5340B3-425-013, (-5340B3-475-013)
		, / Tolerable gross mass of roadtrain, kg		36000
		, / Tolerable gross mass of truck, kg		20500
		/ Distribution of gross mass :		
-		, / tolerable on front axle, kg		7500
-		, / tolerable on rear axle, kg		13000
		, / Equipped truck mass, kg		7140
		/ Distribution of equipped mass :		
-		, / on front axle, kg		4690
-		, / on rear axle, kg		2450
		, / Tolerable payload carried, kg		13210
	/ Engine			-5361 ( -4)
		, / . . / Power, kW /hp		198/270
	/ Gearbox		ZF9S1310 (9JS135 A)	
	/ Number of speeds of the gearbox			9
	/ Gear ratio			4,2
	/ Rear suspension			/
				Spring
		, / / Maximum speed, km/h		85*
	/ Fuel tank, l			500
	/ Tyres dimensions			315/80R22.5
/ Cab				6501 / small
	/ Equipment particularities			

\*) / With speed-limiting device

/ Technical data and dimension are given for standard configuration

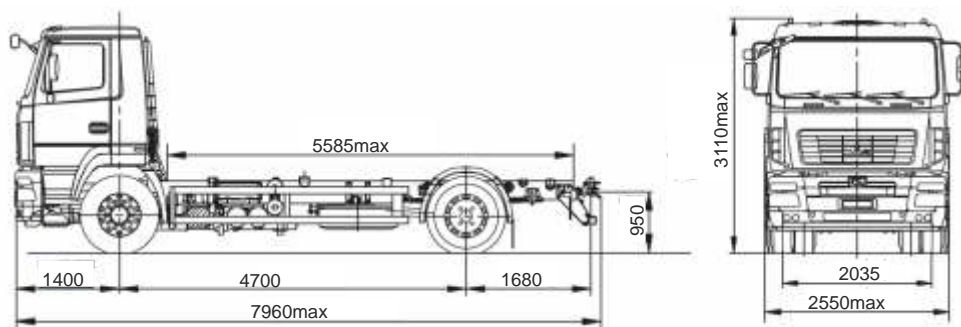



## ШАССИ АВТОМОБИЛЬНЫЕ CHASSIS OF TRUCKS



Designed for installation cranes,  
excavators, concrete mixers

(4 2)

/ MAZ



-5340 5-8425

-5340 5-8475

		<b>-5340B5-8425-013, (-5340B5-8475-013)</b>
	/ Tolerable gross mass of roadtrain, kg	44000
	/ Tolerable gross mass of truck, kg	20500
	/ Distribution of gross mass :	
-	/ tolerable on front axle, kg	7500
-	/ tolerable on rear axle, kg	13000
	/ Equipped truck mass, kg	7440
	/ Distribution of equipped mass :	
-	/ on front axle, kg	4770
-	/ on rear axle, kg	2670
	/ Tolerable payload carried, kg	12810
/ Engine		-5361 ( -4)
	/ . . / Power, kW /hp	228/310
/ Gearbox		ZF9S1310 (9JS135 A)
/ Number of speeds of the gearbox		9
/ Gear ratio		4,59
/ Rear suspension		/
		Spring
	/ Maximum speed, km/h	85*
/ Fuel tank, l		500
/ Tyres dimensions		315/80R22,5
/ Cab		5440 / large
	/ Equipment particularities	

\*) / With speed-limiting device

/ Technical data and dimension are given for standard configuration

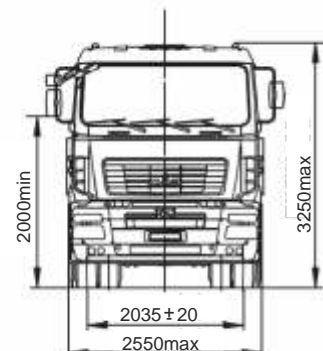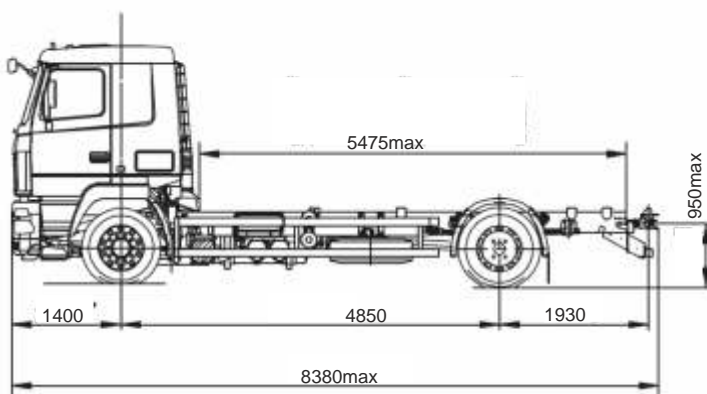



# ШАССИ АВТОМОБИЛЬНЫЕ

## CHASSIS OF TRUCKS

Are designed for different special equipment installation

(4 4)

/ MAZ

-5434 3-460

-5434 3-461





	-5434 3-460-000	-5434 3-461-000
/ Tolerable gross mass of truck, kg	16000	
/ Distribution of gross mass :		
- / tolerable on front axle, kg	7000	
- / tolerable on rear axle, kg	9000	
/ Equipped truck mass, kg	8000	
/ Tolerable payload carried, kg	7850	
/ Engine	-65651 ( -4)	
/ Power, kW / hp	198,6/270	
/ Gearbox	-2381-06	
/ Number of speeds of the gearbox	8	
/ Gear ratio	6,59	
/ Maximum speed, km/h	81	
/ Fuel tank, l	350	
/ Tyres dimensions	14.00R20	
/ Cab	/ small	
/ Equipment particularities		

-5434 3-461-000 -

\*) / With speed-limiting device


/ Technical data and dimension are given for standard configuration

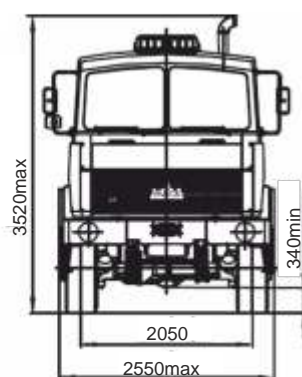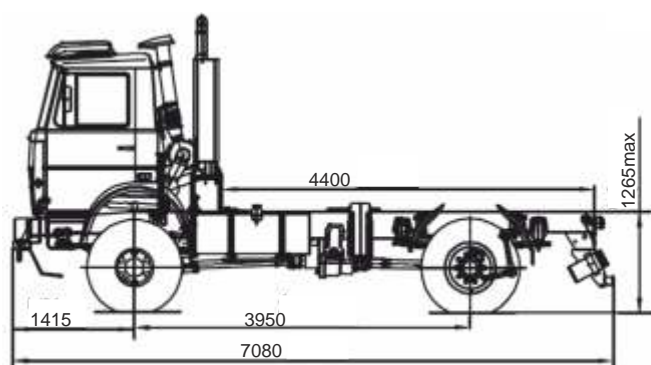



# ШАССИ АВТОМОБИЛЬНЫЕ

## CHASSIS OF TRUCKS

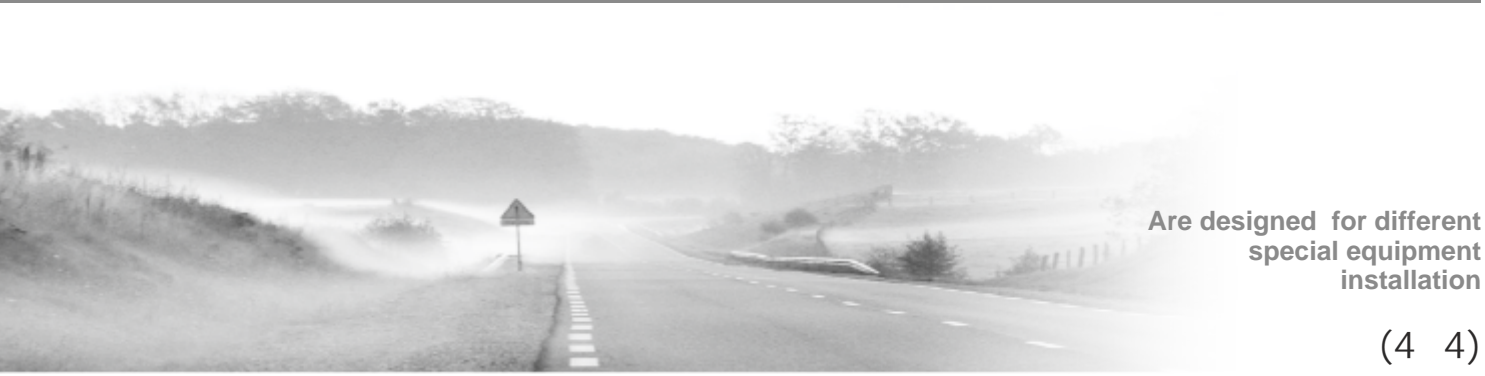


Are designed for different special equipment installation

(4 4)  
/ MAZ  
-5316 5-460  
-5316 5-461

		<b>-5316 5-460-001, (-5316 5-461-001**)</b>
	/ Tolerable gross mass of truck, kg	17150
	/ Distribution of gross mass :	
-	/ tolerable on front axle, kg	7150
-	/ tolerable on rear axle, kg	10000
	/ Equipped truck mass, kg	9500 (9000**)
	/ Tolerable payload carried, kg	7500 (8000**)
	/ Tolerable gross mass of roadtrain, kg	37150
/ Engine		-65853 ( -4)
	/ Power, kW / hp	243/330
/ Gearbox		-239
	/ Number of speeds of the gearbox	9
	/ Gear ratio	6,59
	/ Maximum speed, km/h	79
	/ Fuel tank, l	350
/ Tyres dimensions		16.00R20
	/ Tyres dimensions	/ small
/ Cab		8000
-		60
-	/ Equipment particularities	

\*) / With speed-limiting device

\*\*) / Technical data and dimension are given for standard configuration

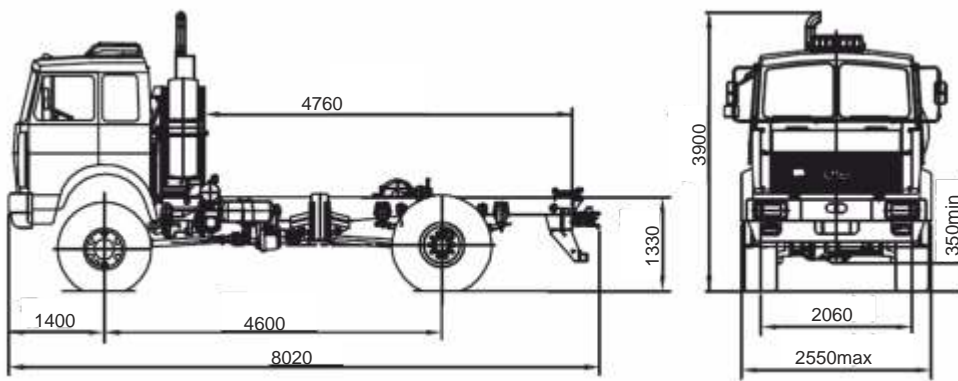

# ШАССИ АВТОМОБИЛЬНЫЕ

## CHASSIS OF TRUCKS

Designed for installation auto-concrete-pumps, auto-vans, truck for water, fuel transportation, washing equipments

(6 4)

/ MAZ

-6312B3-425      -6312B3-485  
-6312B3-429      -6312B3-489



**-6312B3-425-010, -6312B3-429-010  
(-6312B3-485-010, -6312B3-489-010)**



	/ Tolerable gross mass of truck, kg	26500
	/ Distribution of gross mass :	
-	/ tolerable on front axle, kg	7500
-	/ tolerable on rear axle, kg	19000
	/ Equipped truck mass, kg	9430
	/ Distribution of equipped weight	
-	/ on front axle, kg	4830
-	/ on rear axles, kg	4600
	/ Tolerable payload carried, kg	17020
	/ Engine	-5361
	/ Power, kW / hp	198/270
	/ Gearbox	ZF 9S1310TO (9JS135TA)
	/ Number of speeds of the gearbox	9
	/ Rear suspension	6,4
	/ Gear ratio	
	/ Maximum speed, km/h	85*
	/ Fuel tank, l	300
	/ Tyres dimensions	315/80R22,5
	/ Cab	6501 / small
	/ Equipment particularitie	

-6312 3-429(489)-010 -

\*)



/ With speed-limiting device

/ Technical data and dimension are given for standard configuration

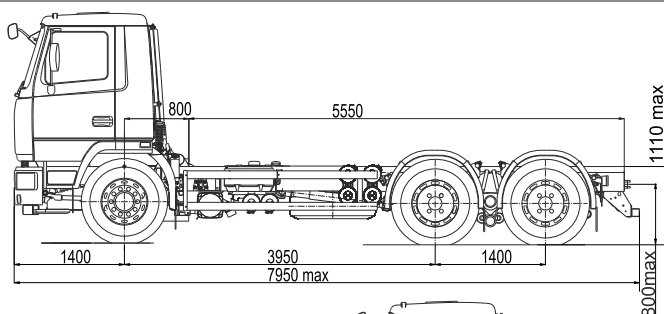

-6312 3-425  
-6312 3-485

-6312 3-429  
-6312 3-489

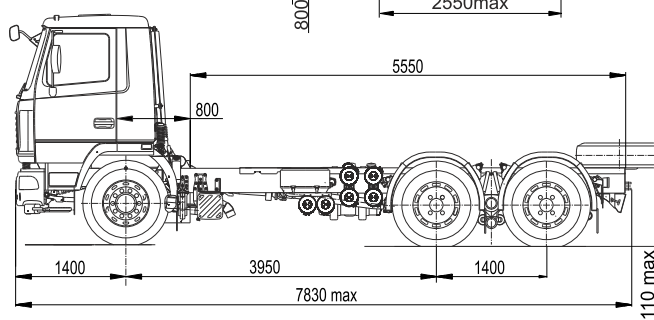





## ШАССИ АВТОМОБИЛЬНЫЕ CHASSIS OF TRUCKS



Designed for installation auto-concrete-pumps,  
auto-vans, truck for water,  
fuel transportation, washing equipments


(6 4)  
/ MAZ  
-6303W4-447

**-6303W4-447-000**

/ Tolerable gross mass of truck, kg		25000
/ Distribution of gross mass :		
-	/ tolerable on front axle, kg	7000
-	/ tolerable on rear axle, kg	18000
/ Equipped truck mass, kg		7800
/ Distribution of equipped weight		
-	/ on front axle, kg	4000
-	/ on rear axles, kg	3800
/ Tolerable payload carried, kg		17050
/ Engine		Cummins 6ISBe4 300
/ Power, kW / hp		220/300
/ Gearbox		9JS135 A
/ Number of speeds of the gearbox		9
/ Gear ratio		5,43
/ Rear suspension		- / leaf-spring
/ Maximum speed, km/h		85*
/ Fuel tank, l		200
/ Tyres dimensions		295/80R22,5
/ Cab		- / small
/ Equipment particularities		

\*) / With speed-limiting device

/ Technical data and dimension are given for standard configuration

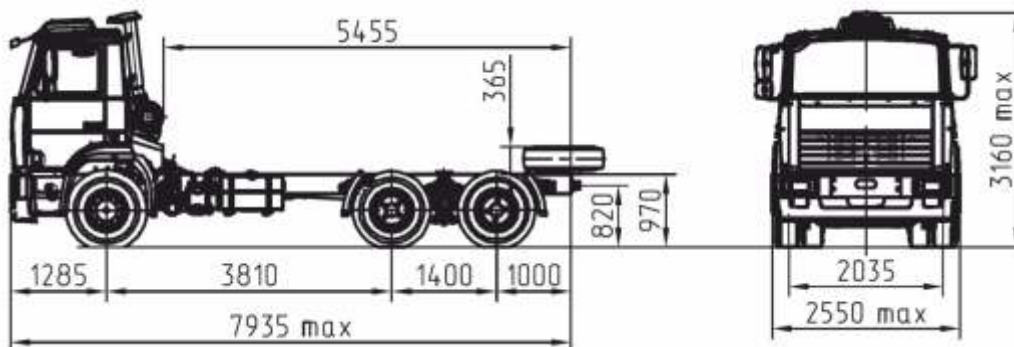

# ШАССИ АВТОМОБИЛЬНЫЕ

## CHASSIS OF TRUCKS

Designed for installation  
auto-concrete-pumps, auto-vans,  
truck for water, fuel transportation,  
washing equipments

(6 4)

/ MAZ

-6312B5-455 (-475)

-6312B5-456 (-476)



	-6312B5-455(-475)-010	-6312B5-456(-476)-010	-6312B5-455(-475)-012	6312B5-475(476)-012
/ Tolerable gross mass of truck, kg		26500		33500
/ Distribution of gross mass :				
- / tolerable on front axle, kg		7500		7500
- / tolerable on rear axle, kg		19000		26000
/ Equipped truck mass,kg		9400		9640
/ Distribution of equipped weight				
- / on front axle, kg		4810		4860
- / on rear axles, kg		4590		4780
/ Payload carried, kg		16950		23710
/ Engine		-536		-536
/ Power, kW /hp		229/312		229/312
/ Gearbox		ZF 9S1310 (9JS135TA)		ZF 9S1310 (9JS135TA)
/ Number of speeds of the gearbox		9		9
/ Gear ratio		5,71		5,71
/ Rear suspension		-		/
/ Maximum speed, km/h		85*		85*
/ Fuel tank, l		300		300
/ Tyres dimensions		315/80R22.5		315/80R22.5
/ Cab		6501 / small		6501 / small
/ Equipment particularities				

-6312B5-456-012 -

(NH/1b NH/1 )

-6312 5-477-012 -

(QH-50 QH-70)

9JS135TA

-6312B5-476-012 -



(QH-50 QH-70

)

\*\*)

/ With speed-limiting device

/ Technical data and dimension are given for standard configuration

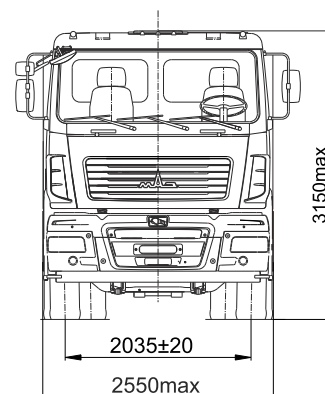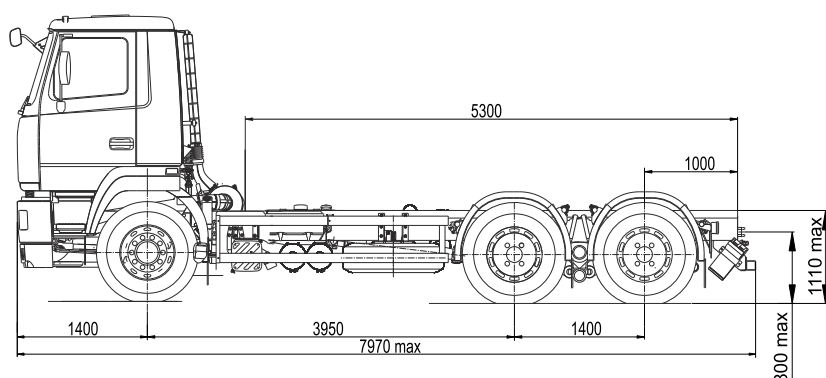



## ШАССИ АВТОМОБИЛЬНЫЕ CHASSIS OF TRUCKS



Designed for installation different special equipments

(6 4)

/ MAZ

-6501B5-420


-6501B5-480

-6501W6-440

	<b>-6501B5-420-041 (-6501B5-480-041)</b>		<b>-6501W6-440-000</b>	
/ Tolerable gross mass of truck, kg	33500		33500	
/ Distribution of gross mass :				
- / tolerable on front axle, kg	7500		7500	
- / tolerable on rear axle, kg	26000		26000	
/ Equipped truck mass,kg	9475		9425	
/ Payload carried, kg	23950		24000	
/ Engine	-536		Cummins ISLE 360 40	
/ . . / Power, kW /hp	228/310		265/360	
/ Gearbox	ZF 9S1310T0 (9JS135 A)		12JS200TA	
/ Number of speeds of the gearbox	9		12	
/ Gear ratio	6,4		5,33	
/ / Maximum speed, km/h	85*		85*	
/ Fuel tank, l	300		300	
/ Tyres dimensions	12.00R20	315/80R22,5	12.00R20	315/80R22,5
/ Cab				
/ Equipment particularities				

\*) / With speed-limiting device

/Technical data and dimension are given for standard configuration

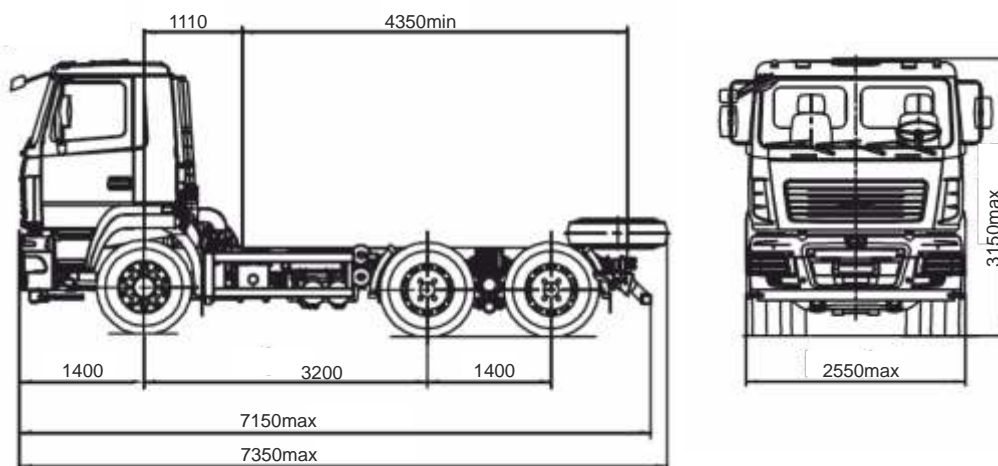

# ШАССИ АВТОМОБИЛЬНЫЕ

## CHASSIS OF TRUCKS

Designed for installation auto-concrete-pumps,  
auto-vans, truck for water,  
fuel transportation, washing equipments

(6 4)


/ MAZ  
-6312B5-8429  
-6312B5-8479



		-6312B5-8429-012 (-6312B5-8479-012)
	/ Tolerable gross mass of roadtrain, kg	44000
	/ Tolerable gross mass of truck, kg	33500
	/ Distribution of gross mass :	
-	/ tolerable on front axle, kg	7500
-	/ tolerable on rear axle, kg	26000
	/ Equipped truck mass,kg	10160
	/ Distribution of equipped weight	
-	/ tolerable on front axle, kg	5360
-	/ tolerable on rear axle, kg	4800
	/ Tolerable payload carried, kg	23190
/ Engine		-536
	/ . . / Power, kW / hp	228/310
/ Gearbox		ZF 9S1310TO (9JS135TA)
/ Number of speeds of the gearbox		9
/ Gear ratio		5,71
/ Rear suspension		/
	/ / Maximum speed, km/h	85*
	/ Fuel tank, l	500
	/ Tyres dimensions	315/80R22.5
/ Cab		5440
/ Equipment particularities		

\*) / With speed-limiting device

/ Technical data and dimension are given for standard configuration

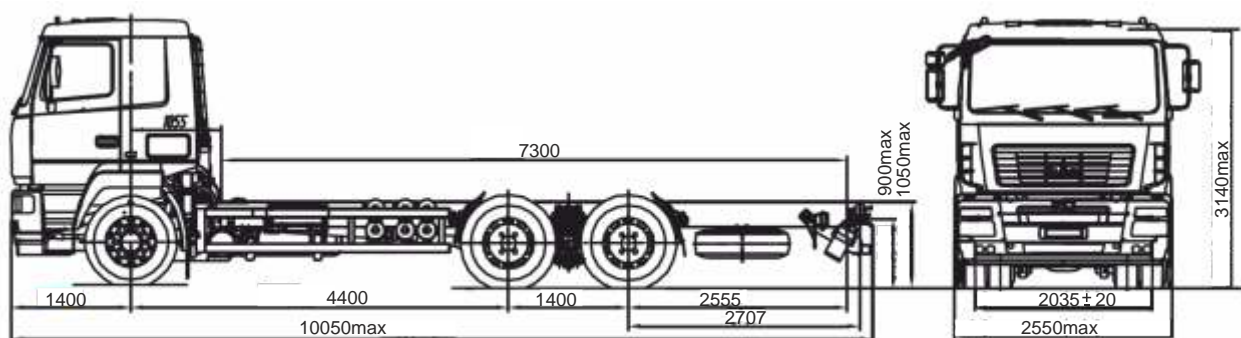





Designed for installation different special equipments

(6 4)

/ MAZ


-6312B9-425(-475)

-6312B9-429(-479)

	-6312B9-425-012 (-6312B9-475-012)	-6312B9-429-012 (-6312B9-479-012)
/ Tolerable gross mass of roadtrain, kg	56500	56500
/ Tolerable gross mass of truck, kg	33500	33500
/ Distribution of gross mass :		
- / tolerable on front axle, kg	7500	7500
- / tolerable on rear axle, kg	26000	26000
/ Equipped truck mass,kg		
/ Payload carried, kg	10400	10600
/ Distribution of equipped mass :		
- / on front axle, kg	5700	5800
- / on rear axles, kg	4700	4800
/ Engine	-651 ( -4)	-651 ( -4)
/ Power, kW / hp	303/412	303/412
/ Gearbox	ZF 16S2520T0 (12js200TA)	ZF 16S2520TO (12js200TA)
/ Number of speeds of the gearbox	16 (12)	16 (12)
/ Gear ratio	4,2 (4.59)	4,59
/ Rear suspension	-	/
/ Maximum speed, km/h		
/ Fuel tank, l	85*	85*
/ Tyres dimensions	500	500
/ Cab	315/80R22,5	315/80R22,5
/ Equipment particularities	6431	6431

\*) / With speed-limiting device

/ Technical data and dimension are given for standard configuration

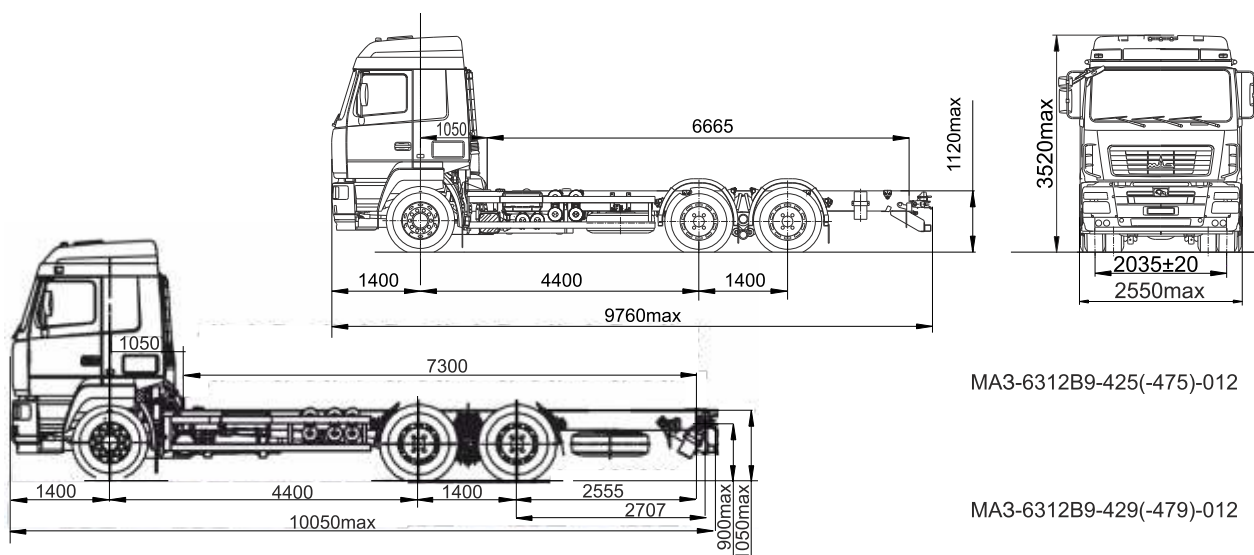

MA3-6312B9-425(-475)-012

MA3-6312B9-429(-479)-012





# ШАССИ АВТОМОБИЛЬНЫЕ

## CHASSIS OF TRUCKS

Designed for installation different special equipments

(8 4)



/ MAZ  
-6516B9-450  
-6516W8-440



	-6516B9-450-000	-6516W8-440-000
/ Tolerable gross mass of truck, kg	41800	41800
/ Distribution of gross mass :		
- / tolerable on front axle, kg	7500+7500	7500+7500
- / tolerable on rear axle, kg	26800	26800
/ Equipped truck mass,kg	11425	11425
/ Payload carried, kg	30300	30300
/ Engine	-651.10 ( -4)	Cummins ISLe 400 40 c AdBlue( -4)
/ . . / Power, kW / hp	303/412	294/400
/ Gearbox	12js200TA	12js200TA
/ Number of speeds of the gearbox	12	12
/ Gear ratio	5,33	5.33
/ Rear suspension	85*	85*
	300	300
/ Maximum speed, km/h	315/80R22,5	315/80R22,5
/ Fuel tank, l		
/ Tyres dimensions		
/ Cab		
/ Equipment particularities		

\*) / With speed-limiting device

/ Technical data and dimension are given for standard configuration

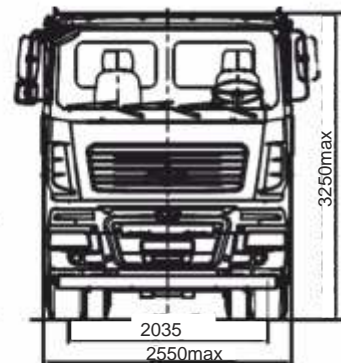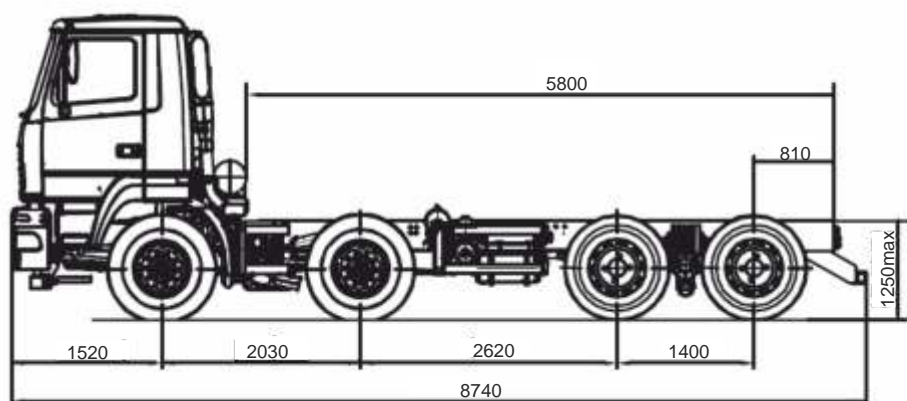



Designed for installation different special equipments

(6 6)

/ MAZ

-6317 5-470(-482)

-6317 9-470(-471)

	-6317 5-470-001 (-6317 5-482-001)	-6317 9-470-001 -6317 9-471-001
/ Tolerable gross mass of roadtrain, kg	45000	55000
/ Tolerable gross mass of truck, kg	33150	33150
/ Distribution of gross mass :		
- / tolerable on front axle, kg	7150	7150
- / tolerable on rear axle, kg	26000	26000
/ Equipped truck mass, kg	11400	11400
/ Payload carried, kg	21600	21600
/ Engine	-65853	-6585,10
/ Power, kW / hp	243/330	309/420
/ Gearbox	-239	-239
/ Number of speeds of the gearbox	9	9
/ Gear ratio	6,59	6,59
/ Maximum speed, km/h	80	80
/ Fuel tank, l	200+350	200+350
/ Tyres dimensions	16,00R20	16,00R20
/ Cab		
/ Equipment particularities		

-6317 9-471-001 -  
-6317 5-482-001-

\*) / With speed-limiting device

/ Technical data and dimension are given for standard configuration

